

CAPACITY 3000 lbs.

INTEGRAL BATTERY / CHARGER

(2) 12V 65AH maintenance free batteries with 110VAC 15A plug-in automatic charger.

SPEED

24-volt Curtis travel controller with infinitely variable speed control.

Variable from 0 mph to 2.8 mph empty Variable from 0 mph to 2.5 mph loaded

WEIGHT

450 lbs. with battery and charger (27x45 Standard)

TIRES / WHEELS DRIVE 8.3" x 2.8" polyurethane

LOAD (2) 2.9" x 3.5" polyurethane


TILLER ARM CONTROLS

Travel, lift, and lower functions are located in the ergonomic operator handle. All operator controls are accessible without having to lift the hand from the handle.

Angle grips are designed to allow easy operation with either hand. Wrap around guard, reversing switch, thumb control, and horn are standard. Low mounted tiller arm offers excellent operator comfort and minimum steering effort.

58" Turning Radius

STANDARD TRUCK DIMENSIONS



Big Lift LLC www.bigjoeforklifts.com 630-916-2600

E30

Electric Pallet Jack

UPGRADE YOUR HAND PALLET TRUCK. NO MORE PUSHING, **PULLING OR PUMPING**

DC motor, solenoid, and gear pump.

DRIVE

24-Volt brushless DC drive motor efficiency and delivers up to 4 hours of continuous duty cycle on a single charge.

BRAKES

Electromagnetic disc brake.

SERVICEABILITY

Removable one piece power head cover allows for easy maintenance.

BATTERY UPGRADE OPTION


 85AH (AGM) batteries for extended run times up to 6 hours

AVAILABLE FORK SIZES

- 27x45 Standard
- 27x36, 27x42, 27 x 48, 22 x 36, 22 x 42, 22 x 48

AVAILABLE TRUCK OPTIONS

- Load back rest, 48" or 60" high
- Tool tray with load restraint
- Traction polyurethane drive tire
- Premium stability bars

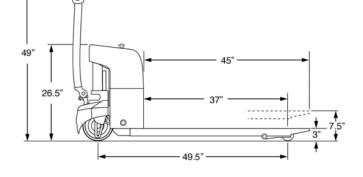

Certification All units are built to be in compliance with the Occupational Safety & Health Act (OSHA)

Big Lift LLC will not assume liability for injuries or damage arising from, or caused by, the removal of any safety devices from their vehicles by user. Because of Big Lift continuing to improve products, specifications are subject to change without notice.

